



IXI 5

This satellite station has been designed to respond to customer demand and can be rolled out to short deadlines. It is compact, quick, and adaptable to customers' requirements.

Eutelsat registration: **F495**

Coordination: **+33 (0) 6 15 80 69 57**

N-1: **+33 (0) 6 14 61 63 97**



Dual-camera captation



2+1 SD/HD MPEG2 / MPEG4
Adaptable on request



Tri phase 32 Amp
8kVA Fisher Panda generator




Mercedes Sprinter 312
DJ-340-AB

Lengths 5.80 m

Widths 2.40 m

Height 2.95 m

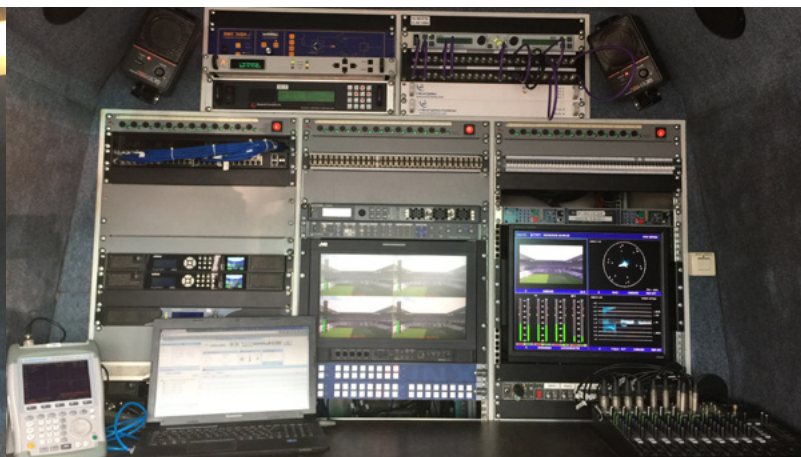



HDTV DSNG unit

Uplink:

- 2+1 SD/HD MPEG2/MPEG4
- 3 Encoders Modulators ATEME CM5000
 - MPEG2 / MPEG 4 - SD / HD
 - DVB-S / DVB-S2
- 2 IRD's Ateme DR5000
 - MPEG2 / MPEG 4 - SD / HD
 - DVB-S / DVB-S2
- 2 Enhancers Mini Stellar E2V 180w phase combine
- Antenna Swedish 1,50m
- Spectrum analyzer Rohde & Schwarz FSH-3

Contact:

Bernard Birebent
+33 (0)6 08 43 60 51
bernard.birebent@ampvisualtv.tv

www.ampvisualtv.tv/en/

Production:

- Analog mixing table
- 2 Bridges 2W GSM
- 2 Inserts RTC
- Prewiring for Codec RNIS
- Intercom system Prospect K6R

- Dual-camera production adaptable on request